


## PCG Series Rooftop Packaged A/C

These self-contained air conditioners feature Copeland scroll compressors, durable cabinets, easily accessible controls and components. They're designed for ease of installation with one-piece top over the indoor section to control water, and side and base electric power entry to minimize roof penetration. Belt drive.


A full range of field-installed accessories is available including roof curbs, economizers (100% fully modulating, plug-in, slip-in), concentric diffusers, low ambient controls to 0°F, and electric heat kits to 24 kW.

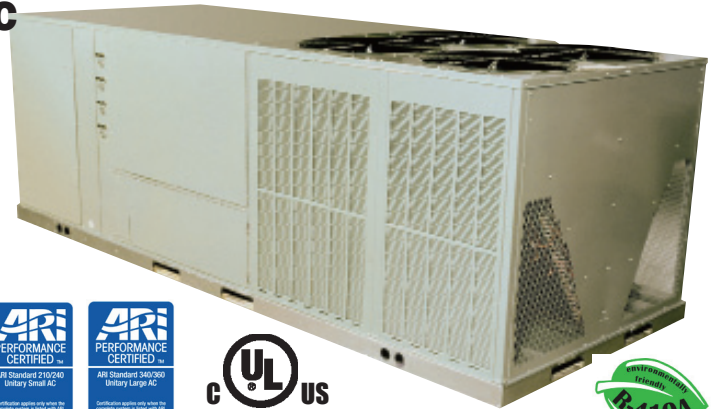

### FEATURES

- Copeland scroll compressors for two-stage cooling, reliability, efficiency and quiet operation—072A and 085A models have two compressors, 090A through 300A have two compressors
- Superior water management with one-piece, over-the-top indoor section with drip lip and 1" raised flanges for supply/return air connections
- Non-corrosive plastic drain pan
- Convertible horizontal and vertical airflow design for field flexibility
- Factory installed 1" disposable filter (optional 2" filters available)
- Easily removed filter, blower, electric heat and compressor/control access panels and externally mounted refrigerant gauge ports for simple service and maintenance
- Full perimeter forkable baserail with lifting holes

Models	Cooling BTUH	EER	Power Supply	Indoor CFM	Min. Circuit Amps	Dimensions W x D x H (inches)	Shipping Wt. (lbs)
PCG072A-3L	73,000	11.5	208/230-3-60	2375	37/37	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	938
PCG072A-4L	73,000	11.5	460-3-60	2375	18	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	938
PCG085A-3L	85,000	11.2	208/230-3-60	3000	42/42	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1002
PCG085A-4L	85,000	11.2	460-3-60	3000	21	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1002
PCG090A-3L	90,000	11.2	208/230-3-60	2775	43/43	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1054
PCG090A-4L	90,000	11.2	460-3-60	2775	21	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1054
PCG102A-3L	97,000	11.2	208/230-3-60	3200	54/54	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1104
PCG102A-4L	97,000	11.2	460-3-60	3200	26	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1104
PCG120A-3L	118,000	11.2	208/230-3-60	3750	54/54	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1157
PCG120A-4L	118,000	11.2	460-3-60	3750	28	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1157
PCG150A-3L	148,000	11.0	208/230-3-60	4400	71/71	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1275
PCG150A-4L	148,000	11.0	460-3-60	4400	36	93 <sup>11</sup> / <sub>16</sub> X 58 <sup>3</sup> / <sub>4</sub> X 44	1275
PCG180A-3L	182,000	11.1	208-230-3-60	5900	81/81	152 <sup>1</sup> / <sub>4</sub> X 85 <sup>29</sup> / <sub>32</sub> X 57	1955
PCG180A-4L	182,000	11.1	460-3-60	5900	40	152 <sup>1</sup> / <sub>4</sub> X 85 <sup>29</sup> / <sub>32</sub> X 57	2087
PCG240A-3L	234,000	11.1	208/230-3-60	7725	109/109	152 <sup>1</sup> / <sub>4</sub> X 85 <sup>29</sup> / <sub>32</sub> X 57	2289
PCG240A-4L	234,000	11.1	460-3-60	7725	56	152 <sup>1</sup> / <sub>4</sub> X 85 <sup>29</sup> / <sub>32</sub> X 57	2427
PCG300A-3L	294,000	10.0	208/230-3-60	9475	149/149	152 <sup>1</sup> / <sub>4</sub> X 85 <sup>29</sup> / <sub>32</sub> X 57	2361
PCG300A-4L	294,000	10.0	460-3-60	9475	63	152 <sup>1</sup> / <sub>4</sub> X 85 <sup>29</sup> / <sub>32</sub> X 57	2499



**Roof Curb Lizard Connections**—Unique interlocking system allows quick field assembly

## HEAT CONTROLLER, INC.

1900 Wellworth Ave., Jackson MI 49203 • Ph. 517-787-2100 • FAX 517-787-9341  
www.heatcontroller.com