



1900 Wellworth Ave. • Jackson, MI 49203  
517-787-2100

# Submittal Data

MODEL  
**PTAC09H130A**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply 208/230V/60

#### Cooling

Capacity	Btu/h	9000/9200
Input	W	780/790
Rated current	A	4.3/4.9
EER	Btu/w	11.3

#### Heating

Capacity	Btu/h	NA
Rated Input (elect. Heater)	W	2150/2580
Rated current	A	10.3/11.3
Max. Current	A	NA

#### Compressor Electrical

Model	KSN71N11VDZ1	
Type	ROTARY	
Brand	GMCC	
Capacitor	mF	20
Refrigerant type	oz	R32/15.17

#### Air flow & Noise level


Indoor air flow	CFM	343/430
Indoor noise level	dB(A)	49/50
Outdoor noise level	dB(A)	63

#### Indoor Fan Motor

Model	ZKFP-25-8-157L	
Input	W	71
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	1020/1110

#### Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A

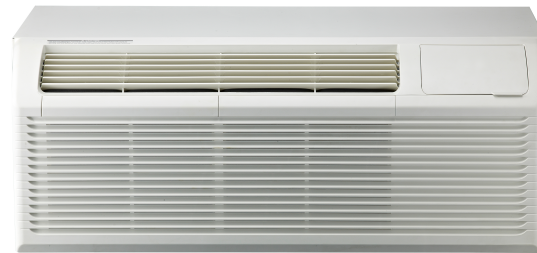

\*FRESH AIR\* (85 CFM)

#### Outdoor Fan Motor

Model	YKT-37-4-203L	
Input	W	71
Speed	RPM	1365

#### Dimensional Data


Dimension(W*H*D)	inch	42.01x15.98x20.94
Packing (W*H*D)	inch	44.49x19.29x24.61
Net/Gross weight	lbs.	97.00/105.82

#### System Data

Design pressure	300/580 PSIG
Thermostat type	Remote Controller
	On-Board
	Wired Thermostat

#### Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-20P

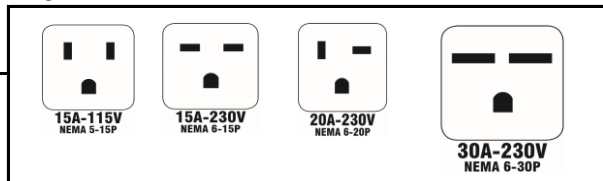

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535