



# SUBMITTAL DATA

## VXP36SA-1

### Air Handler Heat Pump System

|               |               |
|---------------|---------------|
| Location:     | Approval:     |
| Engineer:     | Date:         |
| Submitted to: | Construction: |
| Submitted by: | Unit #:       |
| Reference:    | Drawing #:    |



### INDOOR SPECIFICATION

|                                           |      |                                       |
|-------------------------------------------|------|---------------------------------------|
| Indoor Air Flow (Turbo/H/M/L/Si) (CFM)    |      | 1189.0 / 1083.0 / 971.2 / 865.2 / N/A |
| Indoor Noise Level (Turbo/H/M/L/Si) (dBA) |      | 49/48.0/45.5/25.5/N/A                 |
| Dimension (W×D×H)                         | inch | 21.02 x 21.02 x 49.02                 |
|                                           | mm   | 534.0×534.0×1245.0                    |
| Package (W×D×H)                           | inch | 26.57 x 24.41 x 52.56                 |
|                                           | mm   | 675×620×1335                          |
| Net/Gross Weight                          | lbs  | 129.41/153.88                         |
|                                           | kg   | 58.7/69.8                             |

### OUTDOOR SPECIFICATION

|                              |      |                       |
|------------------------------|------|-----------------------|
| Compressor Type              |      | TWIN-ROTARY           |
| Compressor Model             |      | EKPQ420D1UMUA         |
| Refrigerant                  |      | R454B                 |
| Refrigerant Oil Charge(mL)   |      | 1460                  |
| Refrigerant Oil              |      | VG75                  |
| Outdoor Air Flow (Max) (CFM) |      | 3001.8                |
| Outdoor Noise Level (dBA)    |      | 62.5                  |
| Dimension (W×D×H)            | inch | 38.58 x 16.34 x 38.39 |
|                              | mm   | 980.0×415.0×975.0     |
| Package (W×D×H)              | inch | 45.08 x 19.68 x 42.52 |
|                              | mm   | 1145×500×1080         |
| Net/Gross Weight             | lbs  | 204.15/235.23         |
|                              | kg   | 92.6/106.7            |

### EFFICIENCY

| Cooling |      | Heating |      |
|---------|------|---------|------|
| SEER2   | 17.4 | HSPF2-4 | 10.2 |
| EER2    | 11.7 | COP     | 3.60 |

### PERFORMANCE of Cooling

| Cooling (Btu/hr)                |                  |
|---------------------------------|------------------|
| Rated Capacity                  | 36000            |
| Min/Max Capacity                | 9700~42000       |
| Moisture Removal(L/h)           | 3.4              |
| Standard Operating Range(°F/°C) | -22~-122(-30~50) |
| Rated Cooling Conditions:       |                  |
| Indoor: 80°F DB/67°F WB         |                  |
| Outdoor: 95°F DB/75°F WB        |                  |

### PERFORMANCE of Heating

| Heating (Btu/hr)                                              |                 |
|---------------------------------------------------------------|-----------------|
| 1. @ 47°F Rated                                               | 37000           |
| 2. @ 47°F Min/Max Capacity                                    | 11000~48000     |
| 3. @ 17°F Rated                                               | 31800           |
| 4. @ 5°F Rated: Capacity / COP                                | 39000/1.9       |
| 5. @ 5°F Max: Capacity                                        | 39000           |
| Standard Operating Range(°F/°C)                               | -22~-75(-30~24) |
| 1. Rated Heating Conditions:                                  |                 |
| Indoor: 70°F DB/60°F WB                                       |                 |
| Outdoor: 47°F DB/43°F WB                                      |                 |
| 2. Rated Heating Conditions:                                  |                 |
| Indoor: 70°F DB/60°F WB                                       |                 |
| Outdoor: 17°F DB/15°F WB                                      |                 |
| 3. Heating Conditions, Compressor Operating at Max. Frequency |                 |
| Indoor: 70°F DB/60°F WB                                       |                 |
| Outdoor: 5°F DB/5°F WB                                        |                 |


### ELECTRICAL

|                                  |  |                                        |
|----------------------------------|--|----------------------------------------|
| Indoor Power Supply              |  | 115/208/230V,60Hz,1Ph                  |
| Indoor MCA 115V/(208/230V)       |  | 8.0/6.0                                |
| Indoor MOP                       |  | 15                                     |
| Outdoor Power Supply             |  | 208/230V,60Hz,1Ph                      |
| Outdoor MCA                      |  | 32                                     |
| Outdoor MOP                      |  | 35                                     |
| Communication Wiring             |  | AWG 20-2                               |
| Compressor RLA                   |  | 20.5                                   |
| Outdoor Fan Motor RLA            |  | 2.4                                    |
| Outdoor Fan Motor W              |  | 250                                    |
| Indoor Fan Motor RLA             |  | 4.5                                    |
| Indoor Fan Motor W               |  | 375                                    |
| System Power Input @ Cooling (W) |  | 3076(820 ~ 4440)                       |
| System Power Input @ Heating (W) |  | 3012(665 ~4370)                        |
| MCA: Min. circuit amps (A)       |  | MOCP: Max. over current protection (A) |
| RLA: Rated load amps (A)         |  | W: Fan motor rated output (W)          |

### PIPING


|                                                 |  |               |
|-------------------------------------------------|--|---------------|
| Throttle type(Indoor)                           |  | EXV           |
| Throttle type(Outdoor)                          |  | EXV           |
| Liquid Size                                     |  | 9.52mm(3/8in) |
| Gas Size                                        |  | 19mm(3/4in)   |
| Max. Piping Length(ft/m)                        |  | 246(75)       |
| Max. Height Difference(ft/m)                    |  | 98.4(30)      |
| Max. Pre-charged Length(ft/m)                   |  | 24.6(7.5)     |
| Refrigerant Pre-charged Amount(oz/kg)           |  | 126.99(3.6)   |
| Additional Charge of Refrigerant((oz/ft)/(g/m)) |  | 0.7(65)       |
| Connection Method                               |  | Flared        |

# Indoor Unit Dimension

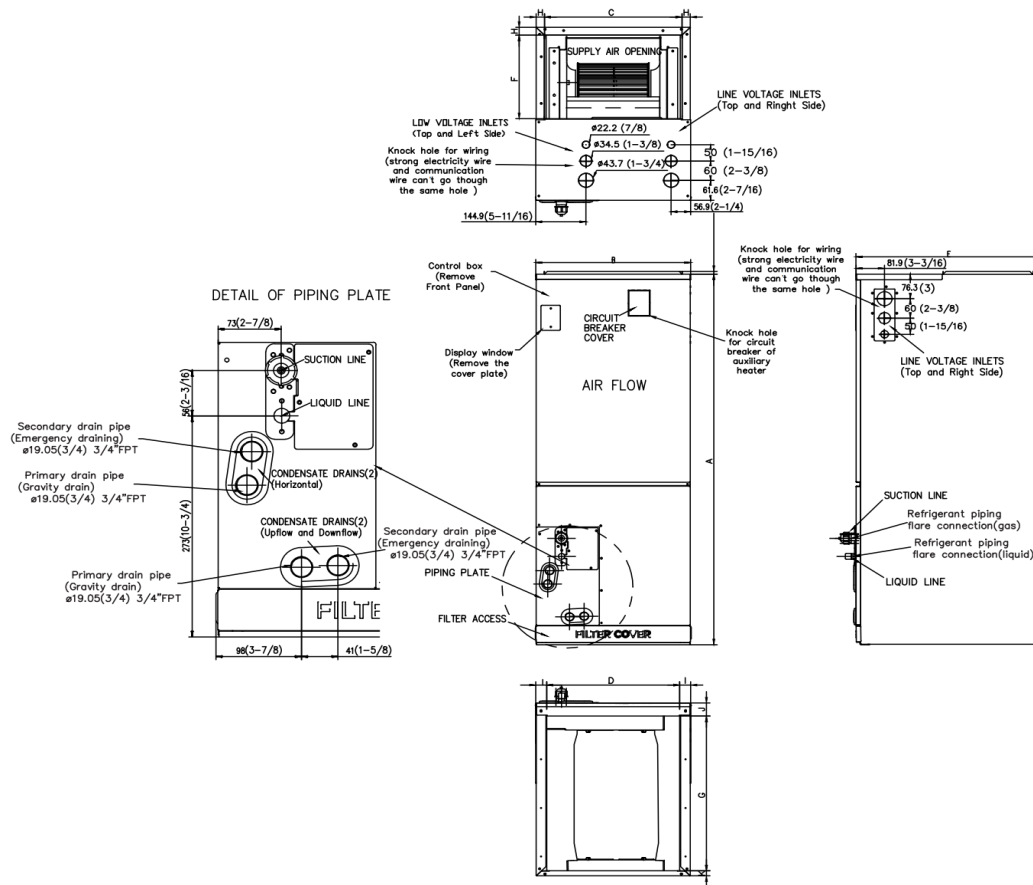


| Dimensions | Model                              | 18k/24k |      | 30k/36k |      | 48k/60k |      |
|------------|------------------------------------|---------|------|---------|------|---------|------|
|            |                                    | inch    | mm   | inch    | mm   | inch    | mm   |
| A          | Model Height                       | 45      | 1143 | 49      | 1245 | 53      | 1346 |
| B          | Model Width                        | 17-1/2  | 445  | 21      | 534  | 24-1/2  | 622  |
| C          | Supply Air Opening Width           | 15-5/8  | 397  | 19-1/8  | 486  | 22-5/8  | 575  |
| D          | Return Air Opening Width           | 15-1/8  | 384  | 18-5/8  | 473  | 22-1/8  | 562  |
| E          | Model Depth                        | 21      | 534  | 21      | 534  | 21      | 534  |
| F          | Supply Air Opening Depth           | 10-1/4  | 260  | 10-1/4  | 260  | 10-1/4  | 260  |
| G          | Return Air Opening Depth           | 18-3/4  | 476  | 18-3/4  | 476  | 18-3/4  | 476  |
| H          | Supply Air Opening Clearance       | 15/16   | 24   | 15/16   | 24   | 15/16   | 24   |
| I          | Return Air Opening Side Clearance  | 1-1/4   | 32   | 1-1/4   | 32   | 1-1/8   | 28   |
| J          | Return Air Opening Front Clearance | 1-1/2   | 38   | 1-5/8   | 41   | 1-5/8   | 41   |
| K          | Return Air Opening Back Clearance  | 5/8     | 16   | 5/8     | 16   | 3/4     | 19   |

## Outdoor Unit Dimension

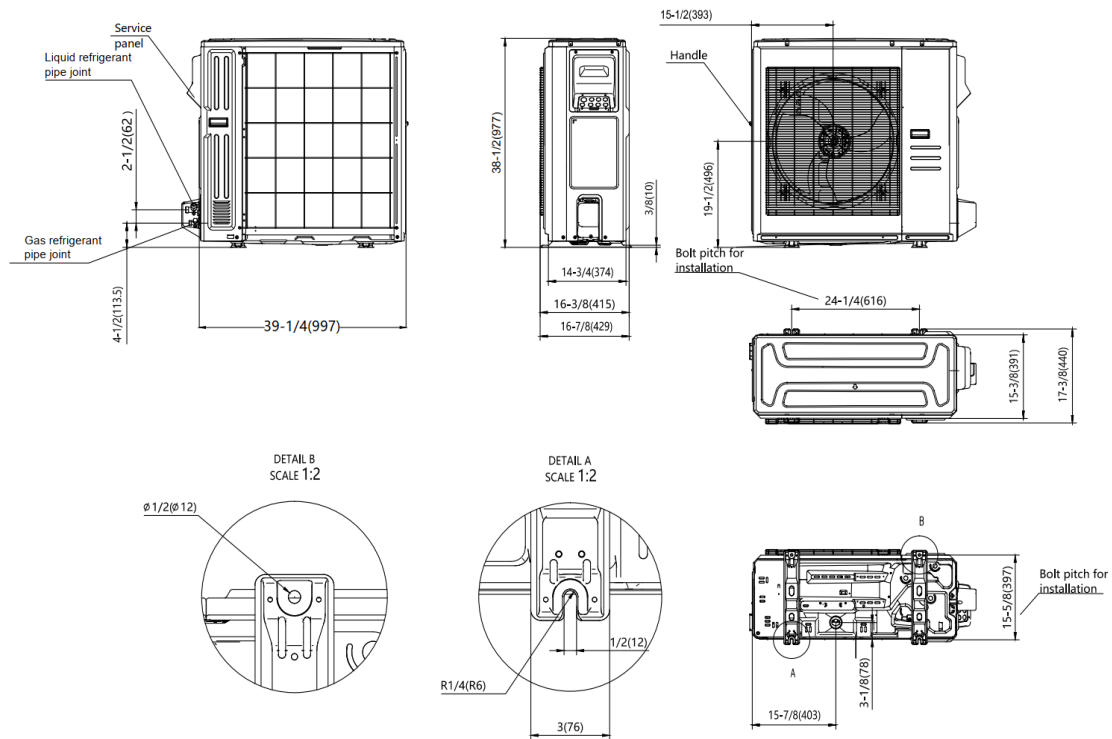


## Installation Instruction For Outdoor Unit

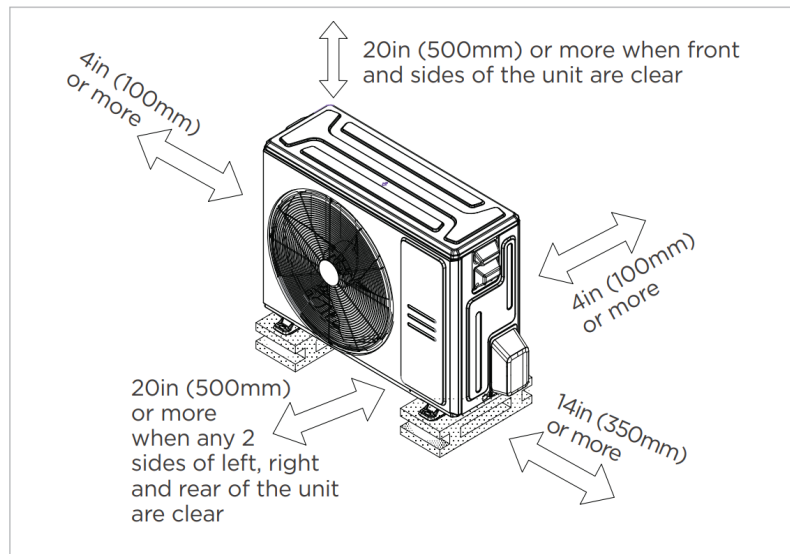

Meets all spatial requirements shown in Installation Clearance Requirements above.

#### Fan Performance For Indoor Unit

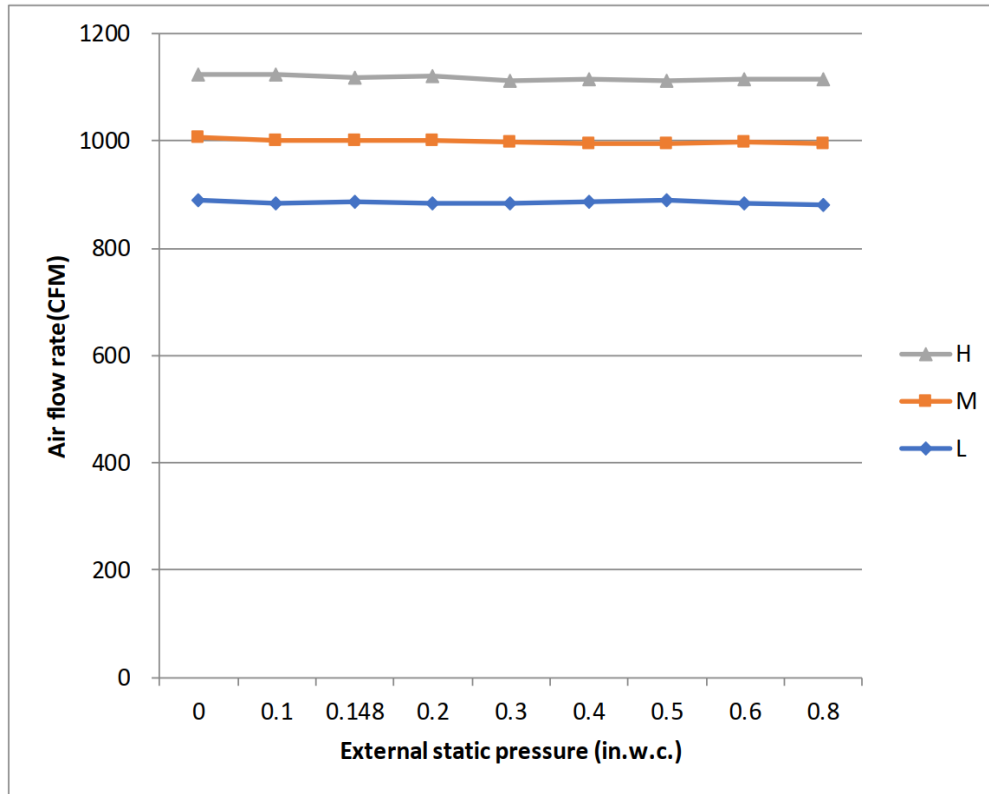

#### Features

- Multi-position installation: horizontal(left or right), vertical( up or down)
- Aluminum Coil
- Constantly Air Flow system up to 0.80 In.W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency(optional)
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Multiple control options available:
  - Two way communication wired controller:120N(X6)
  - Two way communication wired controller with built-in WiFi:120N(X6W)
  - Wireless remote controller
  - Third-Party 24V Thermostat
- Adaptive Control System
- High efficiency up to 19 SEER2, 12.5 EER2, 10.3 HSPF2
- 100% heat output at -4F\*
- Chassis heater and crankcase heater equipped as standard

\* For 36K model, rated cooling capacity/heating capacity at -4F=100%