

High Wall Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	559.2 / 423.8 / 211.9 / 153.0 / /
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	N/A/41 .5/33/23/19
Dimension (WxDxH)	inch 40.31 X 9.69 X 12.64
	mm 1024.0x246.0x321.0
Package (WxDxH)	inch 43.11x12.80x15.75
	mm 1095x325x400
Net/Gross Weight	lbs 28.22/36.82
	kg 12.8/16.7

OUTDOOR SPECIFICATION

Compressor Type	ROTARY
Compressor Model	KTM110D79UFZA3
Refrigerant	R454B
Refrigerant Oil Charge(mL)	500
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1470.6
Outdoor Noise Level (dBA)	57.0
Dimension (WxDxH)	inch 35.0 4 X 13.46 X 26.50
	mm 890.0x342.0x673.0
Package (WxDxH)	inch 39.17 X 15.67 X 29.13
	mm 995x398x740
Net/Gross Weight	lbs 99.65/107.80
	kg 45.2/48.9

EFFICIENCY

Cooling		Heating	
SEER2	35.0	HSPF2-4	30.0
EER2	17.4	COP	4.00

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	6000
Min/Max Capacity	3100~16500
Moisture Removal(L/h)	0.5
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	9000
1. @ 47°F Min/Max Capacity	4100~17200
2. @ 17°F Rated	11000
3. @ 5°F Rated: Capacity / COP	13500/2.00
3. @ 5°F Max: Capacity	13500
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL

Power Supply	208/230V, 60Hz, 1Ph
System MCA	16.0
Connection Wiring	14#x4
System MOCP	20
Compressor RLA	11.6
Outdoor Fan Motor RLA	0.7
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	0.7
Indoor Fan Motor W	60
System Power Input @ Cooling (W)	343(180 ~ 13 80)
System Power Input @ Heating (W)	660(200 ~ 15 85)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV
Liquid Size	6.35mm(1/4in)
Gas Size	9.52mm(3/8in)

Max. Piping Length(ft/m)	82.00(25)
Max. Height Difference(ft/m)	49.20(15)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/g)	44.09(1.25)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.16(15)
Connection Method	Flared


***Minimum Line Set Length is 10' - NO EXCEPTIONS**

Indoor Unit Dimension

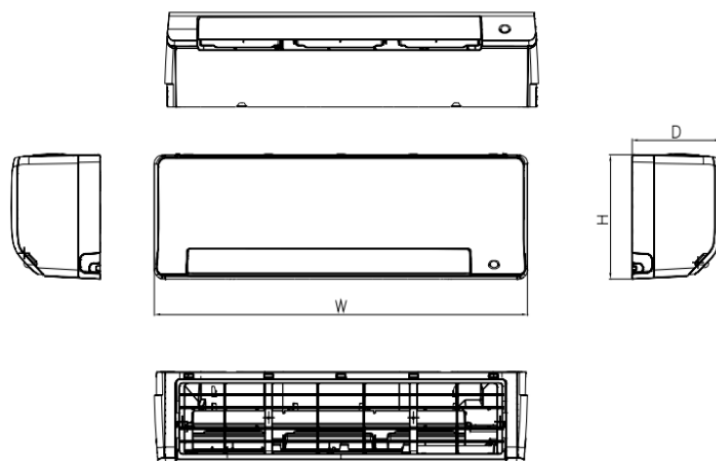


Capacity	Body Code	Unit	W	D	H
6K-15K	C	mm	1017	242	319
		inch	40.04	9.53	12.56
18K-24K	D	mm	1190	280	371
		inch	46.85	11.02	14.61


Installation Instruction

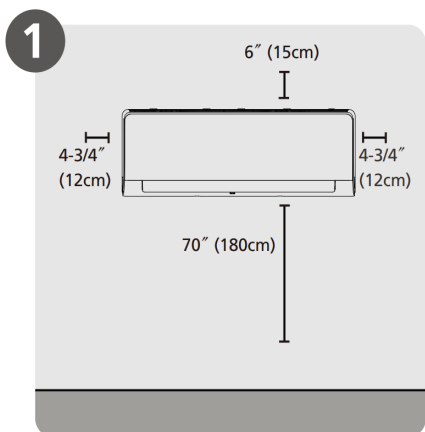

Select Installation Location

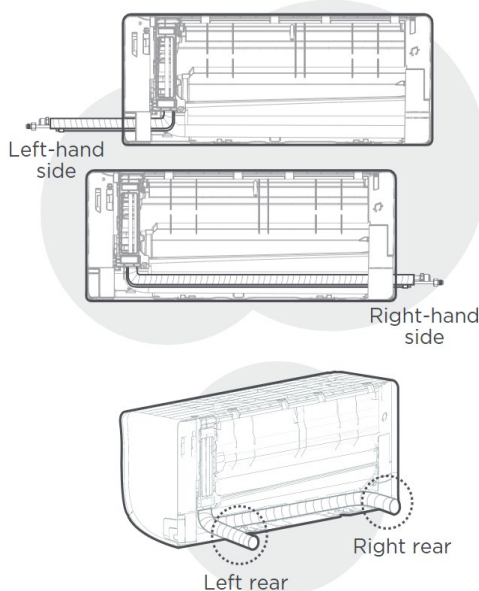


NOTE:
Based on the position of the wall hole relative to the mounting plate, choose the side from which the piping will exit the unit. You have four options for the exit direction of the piping.

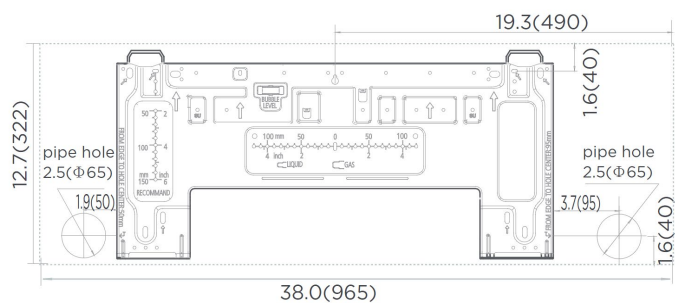


NOTE:
When the gas side connective pipe is Φ (5/8in)16mm or more, the wall hole should be (3-1/2in)90mm.

Outdoor Unit Dimension

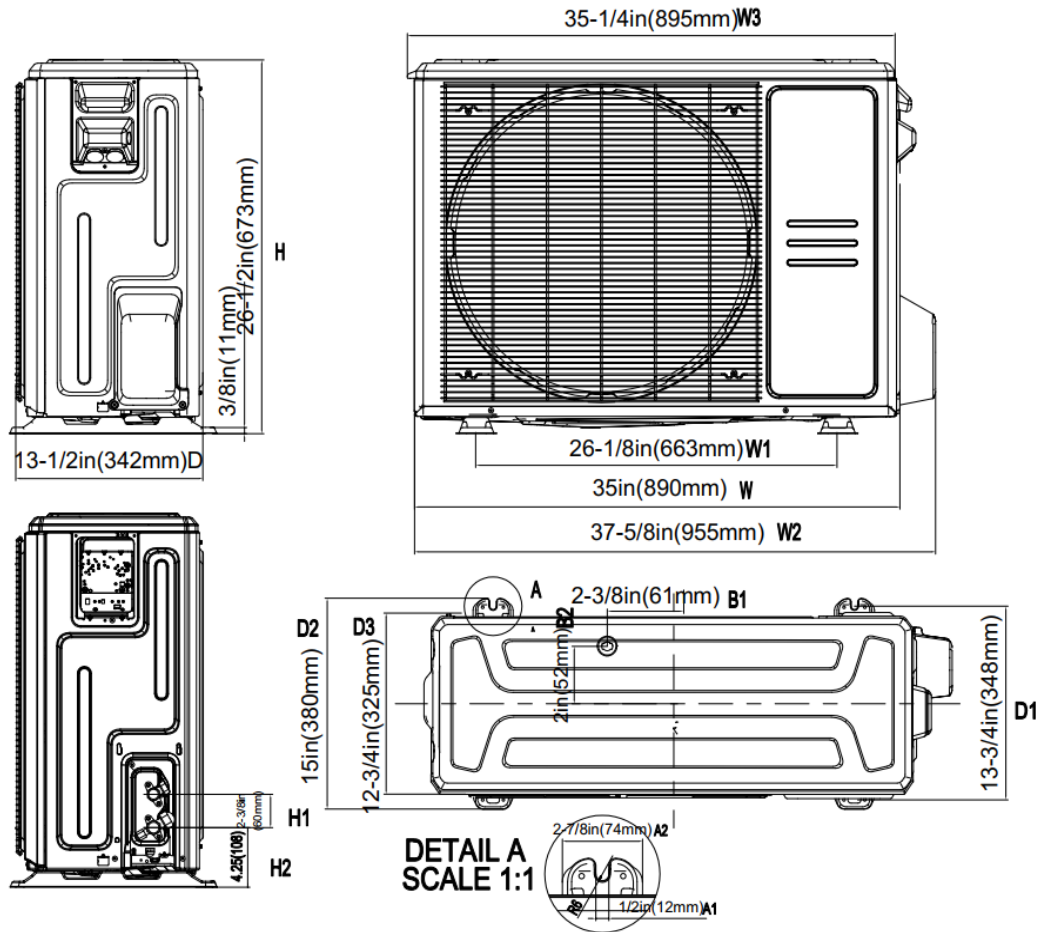

Installation Instruction

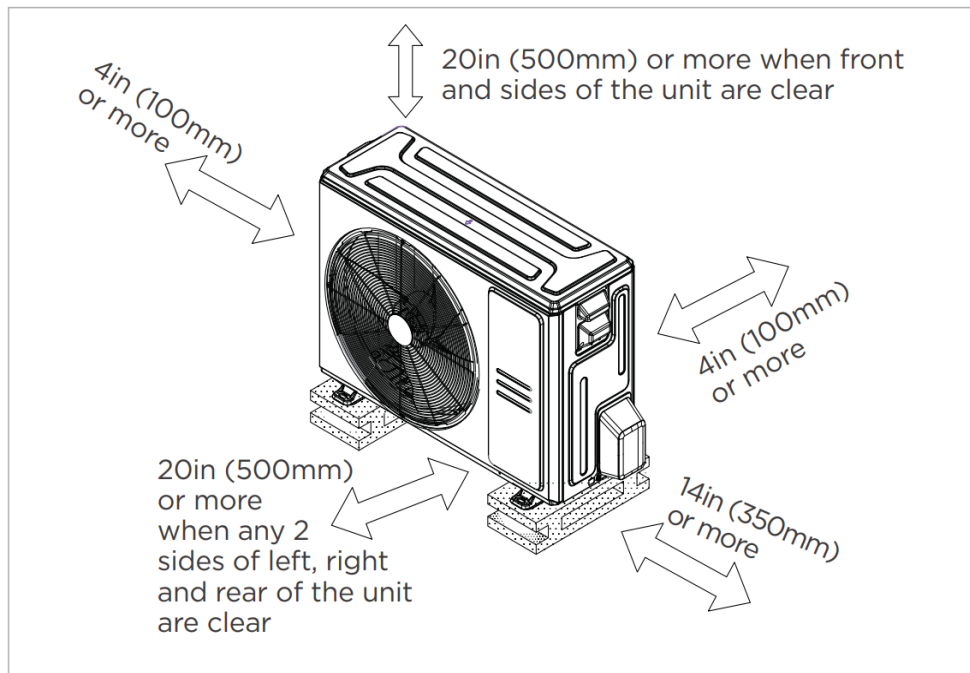

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

FEATURES

- Intelligent eye
- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*